


GIUNTO ANTIVIBBRANTE FLANGIATO PER GAS

CARATTERISTICHE TECNICHE

SOFFIETTO	AISI 321
ATTACCHI	Flange girevoli UNI PN16 in acciaio al carbonio/zincate
PRESSIONE MASSIMA D'ESERIZIO	2,5bar
TEMPERATURA MASSIMA D'ESERCIZIO	250°C

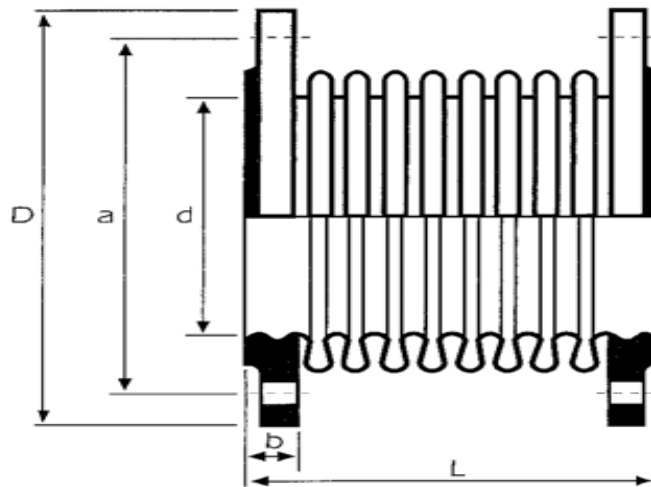

DIMENSIONI

Codice	Diametro	L	d	D	a	b	Nr° fori	Area cm2
.....	40	-----	48.3	150	110	16	4	23
999000000594	50	-----	60.3	165	125	18	4	37
071446	65	150	76.1	185	145	18	4	58
071447	80	160	88.9	200	160	20	8	79
071448	100	170	114.3	220	180	20	8	128
071449	125	185	139.7	250	210	22	8	183
071455	150	195	168.3	285	240	22	8	268
071456	200	210	219.1	340	295	24	12	437
.....	250	-----	273	405	355	26	12	705
.....	300	-----	323.9	460	410	28	12	984



FERRARI