


BON • GAS

Rubinetto a sfera per gas combustibili
Reduced bore ball valve for fuel gas


ART. G.0300 BON•GAS

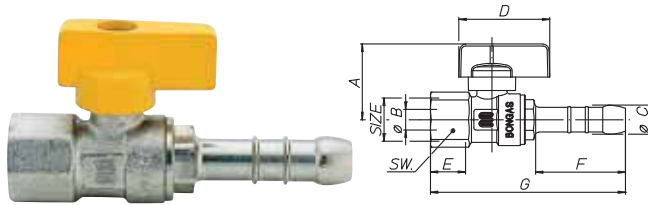

Rubinetto a sfera per gas combustibili femmina con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelato.
Ball cock for fuel gas, female/hose connector according UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	3/8"	1/2"							
A mm	36,5	36,5							
øB pass./bore	10	10							
øC mm	14	14							
D mm	44	44							
E mm	11,4	15							
F mm	44,5	44,5							
G mm	89,5	94,5							
SW mm	21	25							
Peso/Weight gr.	144	155							


ART. G.0302 BON•GAS

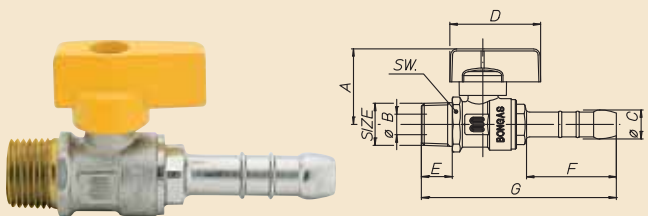

Rubinetto a sfera per gas combustibili maschio con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelato.
Ball cock for fuel gas, male/hose connector according UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	3/8"	1/2"							
A mm	36,6	36,6							
øB pass./bore	10	10							
øC mm	14	14							
D mm	44	44							
E mm	11,9	15							
F mm	44,5	44,5							
G mm	91,5	94,5							
SW mm	21	25							
Peso/Weight gr.	143	153							


ART. G.0308 BON•GAS

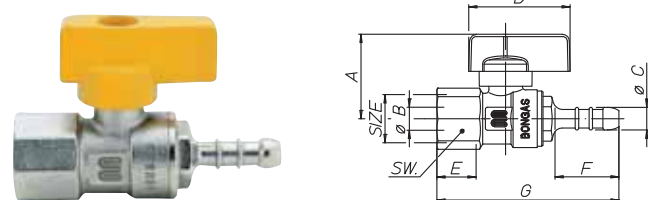

Rubinetto a sfera per G.P.L. femmina con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelato.
Ball cock for L.P.G., female/hose connector according UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	3/8"	1/2"							
A mm	36,5	36,5							
øB pass./bore	10	10							
øC mm	9,8	9,8							
D mm	44	44							
E mm	11,4	15							
F mm	29	29							
G mm	74	79							
SW mm	21	25							
Peso/Weight gr.	129	140							


ART. G.0310 BON•GAS

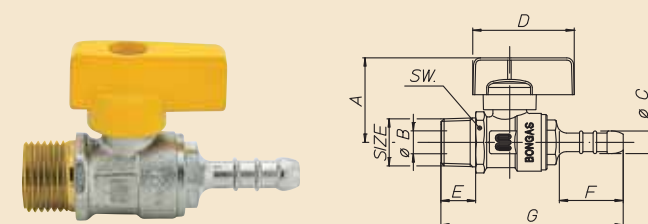

Rubinetto a sfera per G.P.L. maschio con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelato.
Ball cock for L.P.G., male/hose connector according UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/4"	3/8"	1/2"						
A mm	36,6	36,6	36,6						
øB pass./bore	8,5	10	10						
øC mm	9,8	9,8	9,8						
D mm	44	44	44						
E mm	11,5	11,9	15						
F mm	29	29	29						
G mm	76	76	79						
SW mm	21	21	25						
Peso/Weight gr.	125	128	138						


ART. G.0312 BON•GAS

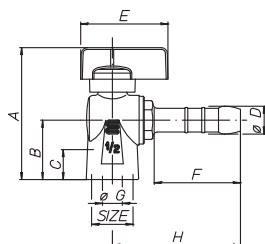

Rubinetto a sfera per gas combustibili a squadra femmina con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelato.
Angled ball cock for fuel gas, female/hose connector according to UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	3/8"	1/2"							
A mm	61,5	66,5							
B mm	25	30							
C mm	11,4	15							
øD mm	14	14							
E mm	44	44							
F mm	44,5	44,5							
øG pass./bore	10	10							
H mm	64,7	64,7							
Peso/Weight gr.	176	154							


ART. G.0314 BON•GAS



Rubinetto a sfera per gas combustibili maschio con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelato.
Angled ball cock for fuel gas, male/hose connector according to UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	3/8"	1/2"							
A mm	65,1	68,5							
B mm	28,5	32							
C mm	11,9	15							
øD mm	14	14							
E mm	44	44							
F mm	44,5	44,5							
øG pass./bore	10	10							
H mm	64,7	64,7							
Peso/Weight gr.	156	165							


ART. G.0320 BON•GAS



Rubinetto a sfera per G.P.L. a squadra femmina con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelato.
Angled ball cock for L.P.G., female/hose connector according to UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	3/8"	1/2"							
A mm	61,5	66,5							
B mm	25	30							
C mm	11,4	15							
øD mm	9,8	9,8							
E mm	44	44							
F mm	29	29							
øG pass./bore	10	10							
H mm	49,2	49,2							
Peso/Weight gr.	161	139							

ART. G.0322 BON•GAS




Rubinetto a sfera per G.P.L. a squadra maschio con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelato.
Angled ball cock for L.P.G., male/hose connector according to UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	3/8"	1/2"							
A mm	65,1	68,6							
B mm	28,5	32							
C mm	11,9	15							
øD mm	9,8	9,8							
E mm	44	44							
F mm	29	29							
øG pass./bore	10	10							
H mm	49,2	49,2							
Peso/Weight gr.	141	154							

BON • GAS

Rubinetto a sfera per gas combustibili
Reduced bore ball valve for fuel gas

ART. G.0323 BON•GAS

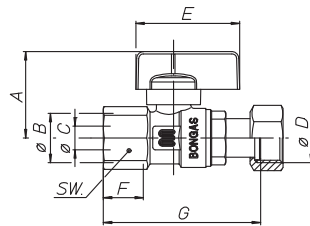


Rubinetto a sfera per gas combustibili diritto femmina per scaldabagno, con levetta in alluminio plastificata gialla, nichelato.

Straight ball cock for fuel gas, female/nut, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/2" x 1/2"	1/2" x 3/4"							
A mm	36,5	36,5							
øB	1/2"	1/2"							
øC pass./bore	10	10							
øD	1/2"	3/4"							
E mm	44	44							
F mm	15	15							
G mm	68	69							
SW mm	25	25							
Peso/Weight gr.	184	205							

ART. G.0324 BON•GAS




Rubinetto a sfera per gas combustibili a squadra femmina per scaldabagno, con levetta in alluminio plastificata gialla, nichelato.

Angled ball cock for fuel gas, female/nut, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/2" x 1/2"	1/2" x 3/4"							
A mm	66,5	66,5							
B mm	30	30							
C mm	15	15							
øD	1/2"	3/4"							
E mm	44	44							
øF pass./bore	10	10							
øG	1/2"	1/2"							
H mm	38,2	39,2							
Peso/Weight gr.	183	204							

ART. G.0325 BON•GAS




Rubinetto a sfera per gas combustibili diritto maschio per scaldabagno, con levetta in alluminio plastificata gialla, nichelato.

Straight ball cock for fuel gas, male/nut, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/2" x 1/2"	1/2" x 3/4"							
A mm	36,6	36,6							
øB	1/2"	1/2"							
øC pass./bore	10	10							
øD	1/2"	3/4"							
E mm	44	44							
F mm	15	15							
G mm	68	69							
SW mm	25	25							
Peso/Weight gr.	182	208							

ART. G.0326 BON•GAS




Rubinetto a sfera per gas combustibili a squadra maschio per scaldabagno, con levetta in alluminio plastificata gialla, nichelato.

Angled ball cock for fuel gas, male/nut, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/2" x 1/2"	1/2" x 3/4"	3/4" x 3/4"						
A mm	68,6	66,6	66,9						
B mm	32	32	30,3						
C mm	15	15	15						
øD	1/2"	3/4"	3/4"						
E mm	44	44	44						
øF pass./bore	10	10	10						
øG	1/2"	1/2"	3/4"						
H mm	38,2	39,2	39,2						
Peso/Weight gr.	198	216	215						


ART. G.0327 BON•GAS



Rubinetto a sfera per gas combustibili femmina/femmina con leva acciaio gialla, nichelato.
Reduced bore ball valve for fuel gas with steel lever, female/female, nickel-plated.

SIZE	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"		
øA pass./bore	10	12,5	17,5	20	25	32	40		
B mm	37	39,5	43	49,5	53,5	63	72		
C mm	90	90	90	105	105	120	140		
D mm	11,4	15	16,3	19,1	21,4	21,4	25,7		
E mm	49,5	60	72	80	89,2	99	118,8		
SW mm	21	25	31	38	47	54	66		
Peso/Weight gr.	151	188	306	430	601	977	1767		


ART. G.0328 BON•GAS



Rubinetto a sfera per gas combustibili femmina/femmina, con farfalla gialla, nichelato.
Reduced bore ball valve for fuel gas with T-handle, female/female, nickel-plated.

SIZE	1/2"	3/4"	1"						
øA pass./bore	12,5	17,5	20						
B mm	38	41,5	49						
C mm	52	52	65						
D mm	15	16,3	19,1						
E mm	60	72	80						
SW mm	25	31	38						
Peso/Weight gr.	166	284	396						



ART. G.0329 BON•GAS



Rubinetto a sfera per gas combustibili maschio/femmina con leva acciaio gialla, nichelato.
Reduced bore ball valve for fuel gas with steel lever, male/female, nickel-plated.

SIZE	1/2"	3/4"	1"						
øA pass./bore	12,5	17,5	20						
B mm	39,5	43	49,5						
C mm	90	90	105						
D mm	15	16,3	16,8						
E mm	13,2	14,5	19,1						
F mm	36,75	41,5	45						
G mm	29	36	40						
H mm	65,75	77,5	85						
SW mm	25	31	38						
Peso/Weight gr.	202	329	450						

ART. G.0330 BON•GAS




Rubinetto a sfera per gas combustibili maschio/femmina, con farfalla gialla, nichelato.
Reduced bore ball valve for fuel gas with T-handle, male/female, nickel-plated.

SIZE	1/2"	3/4"	1"						
øA pass./bore	12,5	17,5	20						
B mm	38	41,5	49						
C mm	52	52	65						
D mm	15	16,3	19,1						
E mm	13,2	14,5	16,8						
F mm	36,75	41,5	45						
G mm	29	36	40						
H mm	65,75	77,5	85						
SW mm	25	31	38						
Peso/Weight gr.	180	307	416						

BON • GAS

Rubinetto a sfera per gas combustibili
Reduced bore ball valve for fuel gas


ART. G.0334 BON•GAS

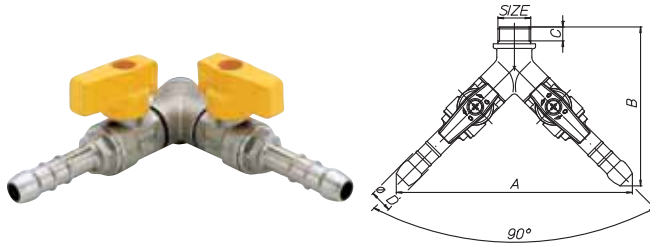

Bolla fil. maschio a due rubinetti a sfera per gas combustibili con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelata.
Twin-bodied ball cock for fuel gas, male/2x hose connector according UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/2"								
A mm	148								
B mm	98								
C mm	10,5								
øD mm	14								
Peso/Weight gr.	370								


ART. G.0342 BON•GAS

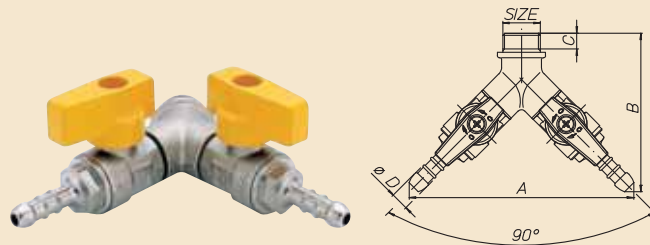

Bolla fil. maschio a due rubinetti a sfera per G.P.L. con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelata.
Twin-bodied ball cock for L.P.G., male/2x hose connector according UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/2"								
A mm	123								
B mm	88								
C mm	10,5								
øD mm	9,8								
Peso/Weight gr.	340								


ART. G.0346 BON•GAS

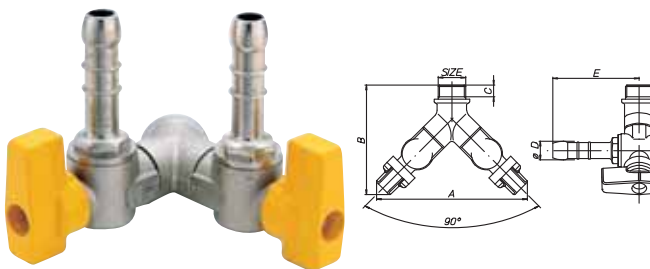

Bolla fil. maschio a due rubinetti a sfera a squadra per gas combustibili con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelata.
Twin-bodied angled ball cock for fuel gas, male/2x hose connector according UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/2"								
A mm	115								
B mm	85,5								
C mm	10,5								
øD mm	14								
E mm	64,5								
Peso/Weight gr.	396								


ART. G.0354 BON•GAS

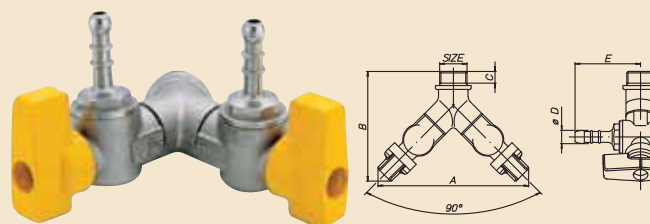

Bolla fil. maschio a due rubinetti a sfera a squadra per G.P.L. con portagomma secondo UNI7141, con levetta in alluminio plastificata gialla, nichelata.
Twin-bodied angled ball cock for L.P.G., male/2x hose connector according UNI7141, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/2"								
A mm	115								
B mm	85,5								
C mm	10,5								
øD mm	9,8								
E mm	49								
Peso/Weight gr.	366								

ART. G.0356 BON•GAS




Rubinetto a sfera a squadra femmina/maschio con levetta in alluminio plastificata gialla, nichelato.

Angled ball cock for fuel gas, female/male, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/2" x 1/2"							
A mm	66,5							
B mm	30							
C mm	15							
øD	1/2"							
E mm	44							
F mm	12							
øG pass./bore	10							
øH	1/2"							
I mm	31,2							
Peso/Weight gr.	142							

ART. G.0358 BON•GAS




Rubinetto a sfera a squadra maschio/maschio con levetta in alluminio plastificata gialla, nichelato.

Angled ball cock for fuel gas, male/male, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/2" x 1/2"							
A mm	68,6							
B mm	32							
C mm	15							
øD	1/2"							
E mm	44							
F mm	12							
øG pass./bore	10							
øH	1/2"							
I mm	31,2							
Peso/Weight gr.	157							

ART. G.0360 BON•FLEX





Rubinetto a sfera per gas combustibili a squadra femmina/femmina con farfalla, per tubo flessibile, nichelato.

Angled ball cock for fuel gas, female/female, with T-handle for flexible hose, nickel-plated.

SIZE	1/2" x 1/2"							
øA pass./bore	12,5							
B mm	31							
C mm	15							
D mm	52							
E mm	15							
F mm	33,5							
G mm	38,5							
H mm	72							
SW mm	26							
Peso/Weight gr.	231							

ART. G.0361 BON•FLEX



Rubinetto a sfera per gas combustibili a squadra femmina/maschio con farfalla, per tubo flessibile, nichelato.


Angled ball cock for fuel gas, female/male, with T-handle for flexible pipe, nickel-plated.

SIZE	1/2" x 1/2"							
øA pass./bore	12,5							
B mm	39,15							
C mm	13,2							
D mm	52							
E mm	15							
F mm	33,5							
G mm	38,5							
H mm	72							
SW mm	26							
Peso/Weight gr.	222							

BON • GAS

Rubinetto a sfera per gas combustibili
Reduced bore ball valve for fuel gas

ART. G.0362 BON•FLEX




Rubinetto a sfera per gas combustibili a squadra, maschio/femmina con farfalla, per tubo flessibile, nichelato.

Angled ball cock for fuel gas, male/female, with T-handle for flexible hose, nickel-plated.

SIZE	1/2" x 1/2"								
øA pass./bore	12,5								
B mm	31								
C mm	15								
D mm	52								
E mm	15								
F mm	36,5								
G mm	38,5								
H mm	75								
SW mm	26								
Peso/Weight gr.	222								

ART. G.0363 BON•FLEX




Rubinetto a sfera per gas combustibili a squadra, maschio/maschio con farfalla, per tubo flessibile, nichelato.

Angled ball valve for fuel gas, male/male, with T-handle for flexible pipe, nickel-plated.

SIZE	1/2" x 1/2"								
øA pass./bore	12,5								
B mm	39,15								
C mm	13,2								
D mm	52								
E mm	15								
F mm	36,5								
G mm	38,5								
H mm	75								
SW mm	26								
Peso/Weight gr.	213								

ART. G.0386 BON•GAS



Rubinetto a sfera per gas combustibili a squadra, maschio/girello con levetta in alluminio plastificata gialla, nichelata.

Angled ball cock for fuel gas, male/nut, with yellow plastic coated aluminium lever, nickel-plated.

SIZE	1/2" x 1/2"	3/4" x 3/4"							
ø A mm	12,5	15							
øB	1/2"	3/4"							
øC	1/2"	3/4"							
D mm	39	39							
E mm	71	76							
F mm	41	34							
G mm	30	42							
H mm	12	15,5							
I mm	26	26							